

HAKKO FX-951 · 952 ESD SAFE



No. FX-951


- Excellent thermal recovery.
- Suitable for various kinds of applications from touch up to heavy duty application.
- Informs you of errors via a warning buzzer or display.
- "Control Card" can lock the temperature settings.
- Quick and easy offsetting of tip temperature by the digital offset function.
- Low temperature alarm function is provided.
- Sleep function prevents the tip from being oxidized and extends the tip life.
- Energy-saving automatic power shut-off function.
- Space-saving compact design.
- Antibacterial color sleeve enables the tip replacement to be easier and more comfortable.
- ESD safe by design.



No. FX-952

- FX-952:-**
- Two soldering irons can be controlled by one station.
 - Allows use of different tips and temperature settings for different application.

Thermal Recovery Graph

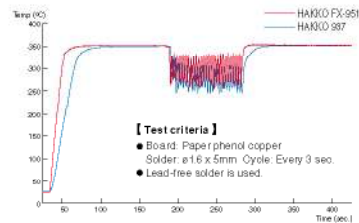

Tip Tray

For storage of tip



No. B2756

Additional System to Expand the FX-951 and FX-952 Functions



Combination sample with the N₂ system
 HAKKO FX-951, HAKKO FM-2026, HAKKO FX-780, HAKKO FX-791
 *For further details, refer to page 14-15.

Specifications

Model No.	FX-951	FX-952
Power Consumption	75W	*1 40W
Temperature Range	200-450°C	
Temperature Stability	± 5°C	

*Wattage would be different value according to the standard.

Station

Model No.	FX-951	FX-952
Output Voltage	24V	
Dimensions	80 (W) x 130 (H) x 131 (D) mm	113 (W) x 106 (H) x 206 (D) mm
Weight (w/o cord)	1.2kg	2.6kg

Iron

Model No.	FM-2026
Power Consumption	AC 24V/70W
Tip to Ground Resistance	< 2
Tip to Ground Potential	< 2mV
Cord	1.2m
Total Length (w/o cord)	188mm with 2.4D tip
Weight (w/o cord)	30g with 2.4D tip

Replacement Tips

Please refer to page 12-13.

Optional Parts

Part No.	Name/Description
B2756	Tip tray
B2765C	Sleeve assembly, yellow
B2768C	Sleeve assembly, orange
B2769C	Sleeve assembly, blue

Packing List

Model Name	Contents
HAKKO FX-951	Station1
	Iron (FM-2025)1
	Power cord1
	Iron holder with cleaning sponge (No.FH100-02)1
	Control card1
HAKKO FX-952	Heat resistant pad1
	Station1
	Iron (FM-2025)2
	Power cord1
	Iron holder with cleaning sponge (No.FH100-04)1
HAKKO FX-952	Control card1
	Heat resistant pad1

*Tips are optional parts.

Sleeve Assemblies

